AUTOMOTIVE





Polyester as well as Poly Ether Foam has a regular and fine cell structure.

It has a higher mechanical strength and is not affected by organic solvents and petroleum products. This Foam complies to FMVSS-302 standards.

This Foam is a perfect medium for flame and glue laminations with various normal and technical textiles or leather. It is easily printable – Spray, Flexo and Screen, which makes it suitable for decoration, gift wrapping/packing and display.


www.sheelafoam.com

Reg. Address: C-55, Preet Vihar, Vikas Marg, New Delhi - 110092 Corp Address: 37/2, Site IV Sahibabad Industrial Area Ghaziabad, (U.P.) 201010 E-mail: <u>b2b@sheelafoam.com</u>
Tel# +91 120 451 2270
Fax# +91 120 416 2282

MAJOR APPLICATIONS:

- » Seat Covers
- » Sound and Vibration Absorption
- » Sun Visors
- » Headliners
- » Door Trims

- » Lamination with fabric /scrim
- » Lamination with vinyl
- » Lamination with leather /synthetic leather

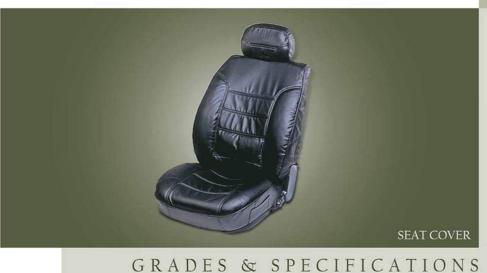

GRADES & SPECIFICATIONS

Grade	Nominal Density (kg/m³)	Hardness kgf (at 50% Compression)	Tensile Strength (Kgf/cm ²⁾	Uses	Applicable Standards
LS 24/70	24 <u>+</u> 1	28 <u>+</u> 4	2.10	General Purpose, Textile Lamination	
LS 28/70	28 <u>+</u> 1	28 <u>+</u> 4	2.20	Packaging Interlining, Shoulder Pad, Flame Lamination	ISO: 845
LS 32/70	32 <u>+</u> 1	30 <u>+</u> 4	2.25	General Purpose, Industrial Application, Vibration Dampening	
LS 36/70	36 <u>+</u> 2	30 <u>+</u> 4	2.23	Industrial Washers, Gaskets, Protective Packaging	ISO: 3386
LS 40/70	40 <u>+</u> 2	30 <u>+</u> 4	2.28	Industrial Washers, Gaskets, Protective Packaging	
25FM	25 <u>+</u> 2	31.75 <u>+</u> 4	1.50	Flame Lamination	
23HF	23 <u>+</u> 2	48 <u>+</u> 4	1.20	Sunvisors	ISO:7888
40HF	40 <u>+</u> 2	99.50 <u>+</u> 4	2.40	Sunvisors	

www.sheelafoam.com

Reg. Address: C-55, Preet Vihar, Vikas Marg, New Delhi - 110092 Corp Address: 37/2, Site IV Sahibabad Industrial Area Ghaziabad, (U.P.) 201010

E-mail: <u>b2b@sheelafoam.com</u> **Tel#** +91 120 451 2270 **Fax#** +91 120 416 2282